

CELSTRAN® PA6-GF60-01 AF3001 NATURAL

CELSTRAN® Long Fibre

60% long strand glass fiber reinforced nylon 6 Natural

Product information

Resin Identification	PA6-LGF60	ISO 1043
Part Marking Code	>PA6-LGF60<	ISO 11469

Typical mechanical properties

Tensile modulus	20400 MPa	ISO 527-1/-2
Tensile stress at break, 5mm/min	275 MPa	ISO 527-1/-2
Tensile strain at break, 5mm/min	1.9 %	ISO 527-1/-2
Flexural modulus	18400 MPa	ISO 178
Flexural strength	460 MPa	ISO 178
Charpy notched impact strength, 23°C	54 kJ/m ²	ISO 179/1eA
Izod notched impact strength, 23°C	52 kJ/m ²	ISO 180/1A
Izod impact strength, -40°C	49.6 kJ/m ²	ISO 180/1U
Poisson's ratio	0.33 ^[C]	

[C]: Calculated

Thermal properties

Temperature of deflection under load, 1.8 MPa	215 °C	ISO 75-1/-2
---	--------	-------------

Physical/Other properties

Density	1690 kg/m ³	ISO 1183
---------	------------------------	----------

Characteristics

Processing	Injection Moulding
Delivery form	Pellets

Additional information

Injection molding

Preprocessing

PA6&PA66 drying requirements: 4 hrs. @80° C.
A dehumidifier or desiccant dryer is recommended.

Processing

Celstran can be processed on a standard injection molding unit.
A general purpose metering screw is recommended with a zone distribution of 40% feed, 40% transition, and 20% metering.
A free flowing check ring assembly is recommended.

Melt Temp: 290-300°C.
Mold Temp: 90- 100°C.

Processing Notes

Pre-Drying

CELSTRAN® PA6-GF60-01 AF3001 NATURAL


CELSTRAN® Long Fibre

CELSTRAN PA should in principle be predried. Because of the necessary low maximum residual moisture content the use of dry air dryers is recommended. The dew point should be $\leq -30^{\circ}\text{C}$. The time between drying and processing should be as short as possible.

Storage

Note: Material can be over dried and may discolor.

Stress-strain

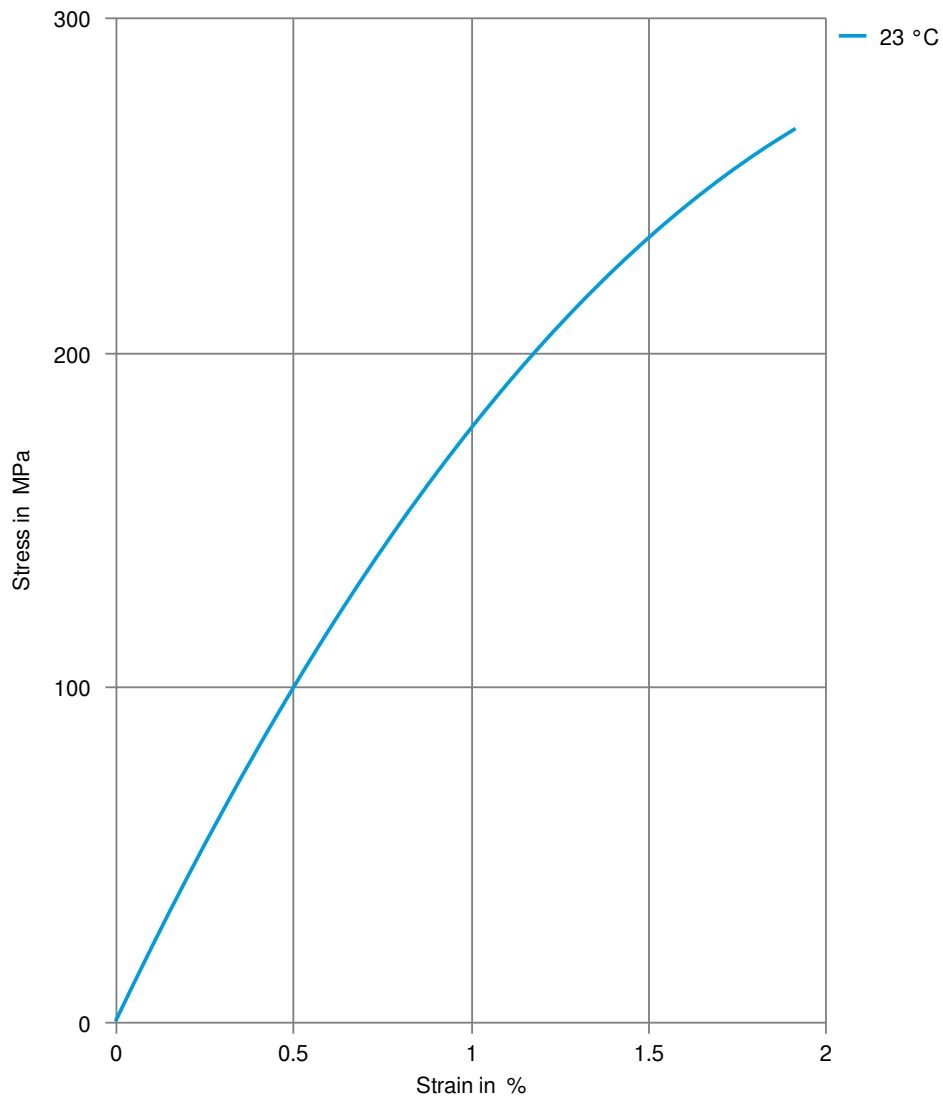

CELSTRAN® PA6-GF60-01 AF3001 NATURAL

CELSTRAN® Long Fibre

Secant modulus-strain

