

CELSTRAN® PA6-GF60-01 P11/10

CELSTRAN® Long Fibre

60% long strand glass fiber reinforced nylon 6 Natural

Product information

Resin Identification	PA6-LGF60	ISO 1043
Part Marking Code	>PA6-LGF60<	ISO 11469

Typical mechanical properties

Tensile modulus	21000 MPa	ISO 527-1/-2
Tensile stress at break, 5mm/min	275 MPa	ISO 527-1/-2
Tensile strain at break, 5mm/min	1.9 %	ISO 527-1/-2
Flexural modulus	19000 MPa	ISO 178
Flexural strength	450 MPa	ISO 178
Charpy impact strength, 23°C	100 kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23°C	54 kJ/m ²	ISO 179/1eA
Poisson's ratio	0.33 ^[C]	
[C]: Calculated		

Thermal properties

Temperature of deflection under load, 1.8 MPa	215 °C	ISO 75-1/-2
---	--------	-------------

Physical/Other properties

Density	1690 kg/m ³	ISO 1183
---------	------------------------	----------

Characteristics

Processing	Injection Moulding
Delivery form	Pellets

Additional information

Injection molding

Preprocessing

PA6&PA66 drying requirements: 4 hrs. @80° C.
A dehumidifier or desiccant dryer is recommended.

Processing

Celstran can be processed on a standard injection molding unit.
A general purpose metering screw is recommended with a zone distribution of 40% feed, 40% transition, and 20% metering.
A free flowing check ring assembly is recommended.

Melt Temp: 290-300°C.
Mold Temp: 90- 100°C.

Processing Notes

Pre-Drying

CELSTRAN PA should in principle be predried. Because of the necessary low

CELSTRAN® PA6-GF60-01 P11/10


CELSTRAN® Long Fibre

maximum residual moisture content the use of dry air dryers is recommended.
The dew point should be $\leq -30^{\circ}\text{C}$. The time between drying and processing
should be as short as possible.

Storage

Note: Material can be over dried and may discolor.

Stress-strain

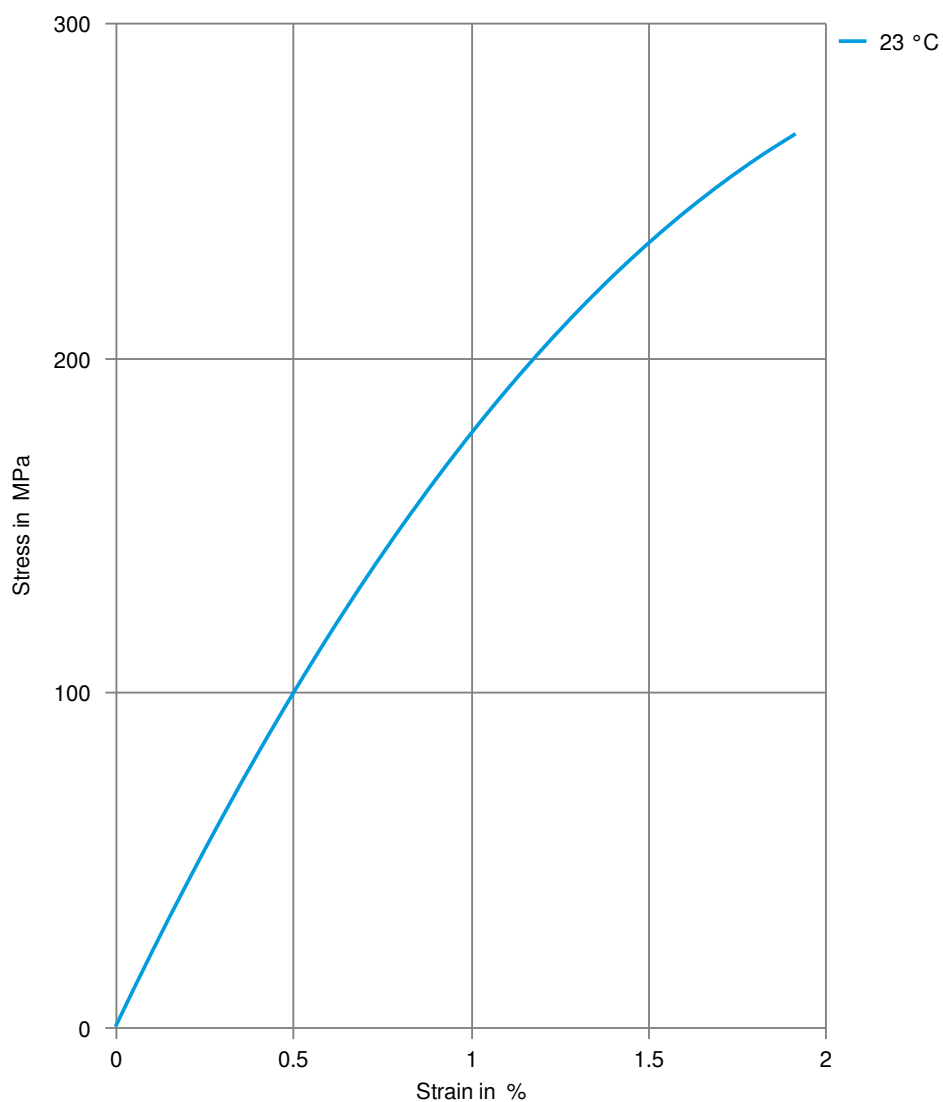

CELSTRAN® PA6-GF60-01 P11/10

CELSTRAN® Long Fibre

Secant modulus-strain

