

HOSTAFORM® S 9364 XAP®2 ECO-B

Impact modified, improved modulus and weld line, low emission

Hostaform® acetal copolymer grade S 9364 XAP®2 is a highly impact modified grade for demanding applications.

Hostaform® S 9364 XAP®2 provides a significant improvement in impact strength and flexibility over standard impact modified grades such as Hostaform® S 9362 and S 9364, and also exhibits exceptional low emission performance meeting or exceeding the requirements of many automotive markets. Chemical abbreviation according to ISO 1043-1: POM-HI

ECO-B: Hostaform ECO-B is a POM-Copolymer with the same properties and performance as standard grades but produced with sustainability in mind. Using a mass-balance approach, biogenic feedstocks are used to offset the use of fossil-based raw materials and decrease greenhouse gas emissions. The process is audited and certified according to the ISCC Plus mass balance approach.

Rheological properties

Melt volume-flow rate	4 cm ³ /10min	ISO 1133
Temperature	190 °C	
Load	2.16 kg	
Moulding shrinkage range, parallel	1.6 %	ISO 294-4, 2577
Moulding shrinkage range, normal	1.5 %	ISO 294-4, 2577

Typical mechanical properties

Tensile Modulus	1650 MPa	ISO 527-1/-2
Yield stress, 50mm/min	43 MPa	ISO 527-1/-2
Yield strain, 50mm/min	16 %	ISO 527-1/-2
Flexural Modulus	1550 MPa	ISO 178
Flexural Stress at 3.5%	42 MPa	ISO 178
Charpy impact strength, 23°C	NB kJ/m ²	ISO 179/1eU
Charpy impact strength, -30°C	NB kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23°C	21 kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -30°C	11 kJ/m ²	ISO 179/1eA
Izod notched impact strength, 23°C	20 kJ/m ²	ISO 180/1A
Izod notched impact strength, -40°C	10 kJ/m ²	ISO 180/1A

Thermal properties

Melting temperature, 10°C/min	166 °C	ISO 11357-1/-3
Temp. of deflection under load, 1.8 MPa	75 °C	ISO 75-1/-2
Temp. of deflection under load, 0.45 MPa	140 °C	ISO 75-1/-2
Vicat softening temperature, 50°C/h, 50N	122 °C	ISO 306
Coeff. of linear therm. expansion, parallel	120 E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, normal	110 E-6/K	ISO 11359-1/-2

Other properties

Humidity absorption, 2mm	0.25 %	Sim. to ISO 62
Water absorption, 2mm	0.8 %	Sim. to ISO 62
Density	1360 kg/m ³	ISO 1183

HOSTAFORM® S 9364 XAP®2 ECO-B

Injection


Drying Temperature	100 - 120 °C
Drying Time, Dehumidified Dryer	3 - 4 h
Max. mould temperature	60 - 70 °C
Back pressure	2 MPa
Injection speed	slow

Characteristics

Additives	Release agent, Biobased
-----------	-------------------------


HOSTAFORM® S 9364 XAP®2 ECO-B

Stress-strain

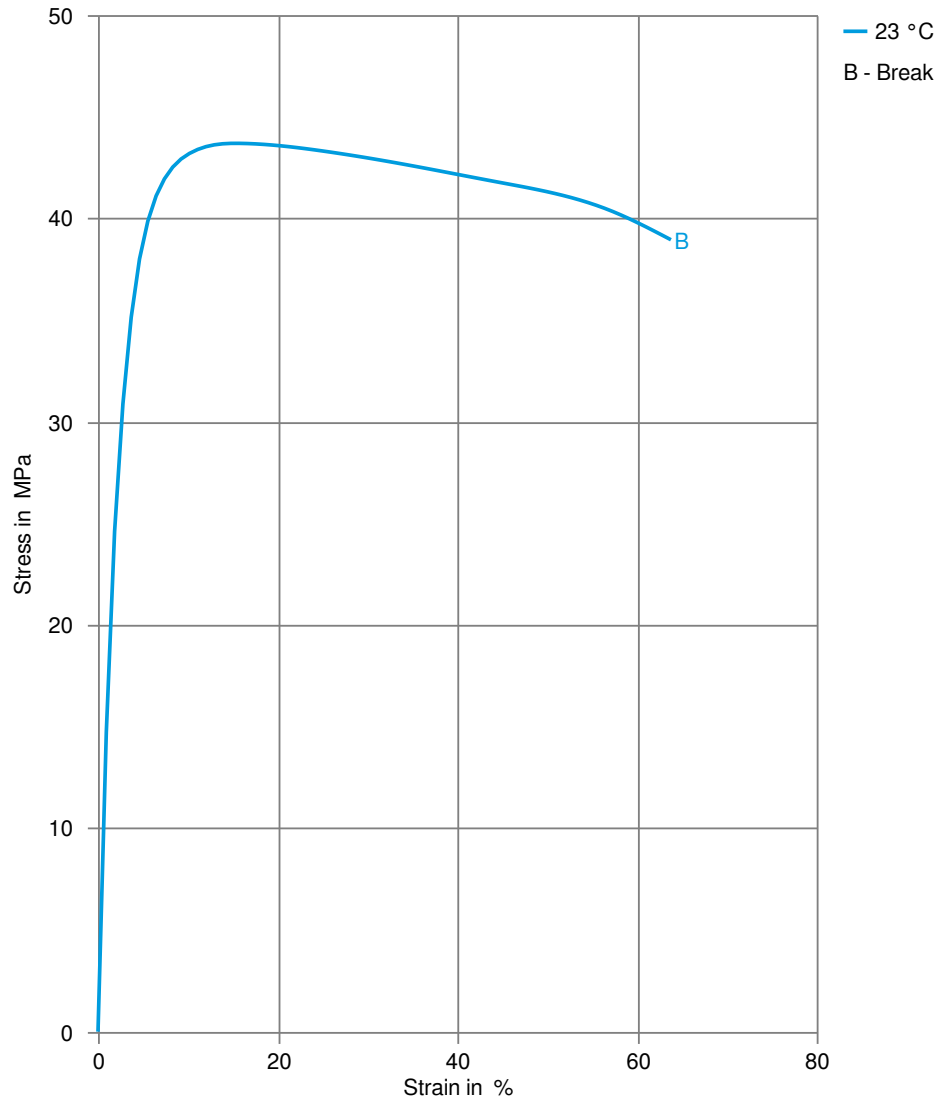

HOSTAFORM® S 9364 XAP®2 ECO-B

Secant modulus-strain

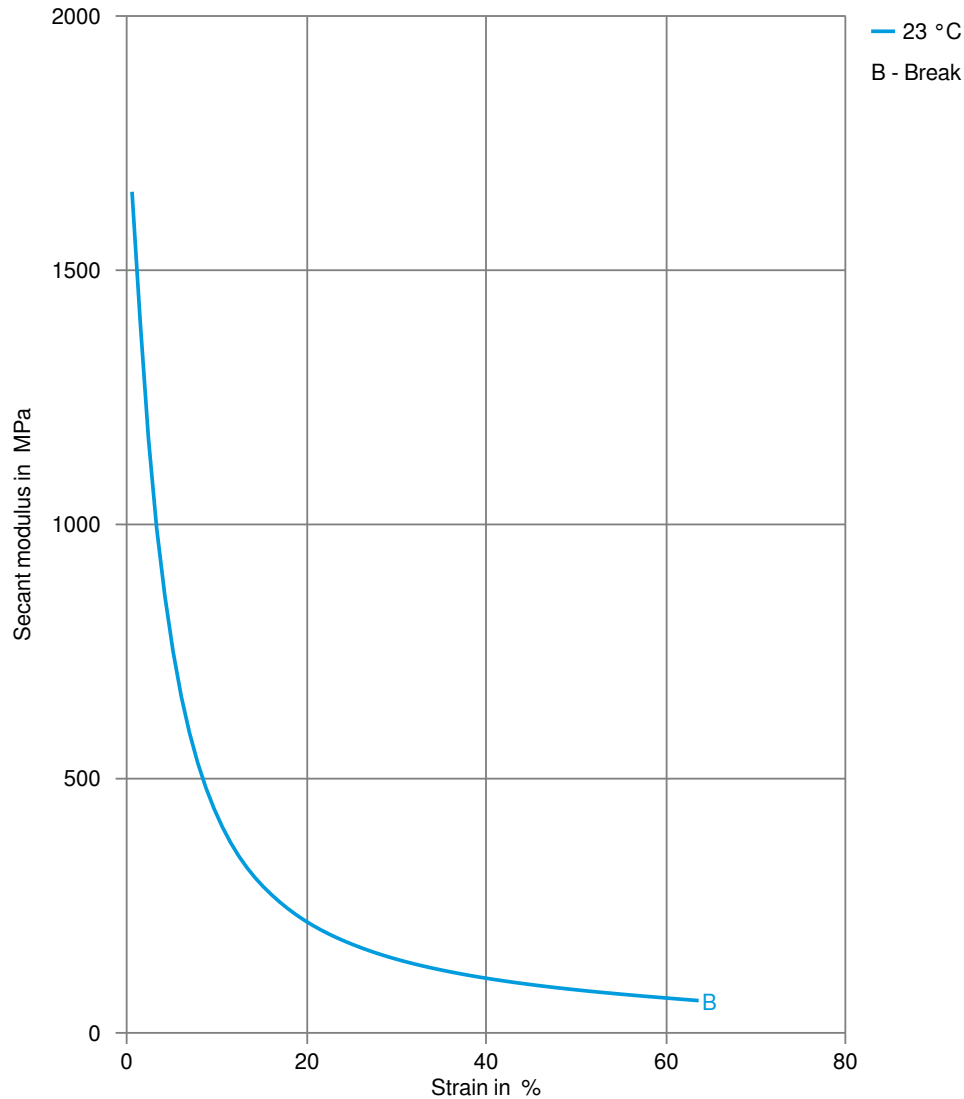

HOSTAFORM® S 9364 XAP®2 ECO-B

Processing Texts

Pre-drying

Drying is suggested to help achieve low emission performance and to counter if material has contacted moisture through improper storage and handling.