

VECTRA® A430

Liquid Crystal Polymer

Provides many of the characteristics of A130 with added lubricity. Suitable for applications requiring excellent wear characteristics. Excellent electrical properties at high frequencies. LCP/PTFE blend. Chemical abbreviation according to ISO 1043-1 : LCP Inherently flame retardant UL-Listing V-0 in natural and black at 0.43mm thickness per UL 94 flame testing. Relative-Temperature-Index (RTI) according to UL 746B: electrical 130 °C, mechanical 130 °C. UL = Underwriters Laboratories (USA)

Product information

Resin Identification	LCP-PTFE	ISO 1043
Part Marking Code	>(LCP-PTFE)<	ISO 11469

Rheological properties

Moulding shrinkage, parallel	0 %	ISO 294-4, 2577
Moulding shrinkage, normal	0.7 %	ISO 294-4, 2577

Typical mechanical properties

Tensile modulus	7000 MPa	ISO 527-1/-2
Tensile stress at break, 5mm/min	150 MPa	ISO 527-1/-2
Tensile strain at break, 5mm/min	5.8 %	ISO 527-1/-2
Flexural modulus	7100 MPa	ISO 178
Flexural strength	120 MPa	ISO 178
Compressive modulus	6000 MPa	ISO 604
Compressive stress at 1% strain	38 MPa	ISO 604
Charpy impact strength, 23 °C	86 kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23 °C	47 kJ/m ²	ISO 179/1eA
Izod notched impact strength, 23 °C	34 kJ/m ²	ISO 180/1A
Izod impact strength, 23 °C	67 kJ/m ²	ISO 180/1U
Hardness, Rockwell, M-scale	55	ISO 2039-2
Poisson's ratio	0.35 ^[C]	

[C]: Calculated

Thermal properties

Melting temperature, 10 °C/min	280 °C	ISO 11357-1/-3
Temperature of deflection under load, 1.8 MPa	165 °C	ISO 75-1/-2
Temperature of deflection under load, 0.45 MPa	227 °C	ISO 75-1/-2
Temperature of deflection under load, 8 MPa	89 °C	ISO 75-1/-2
Vicat softening temperature, 50 °C/h 50N	138 °C	ISO 306
Coefficient of linear thermal expansion (CLTE), parallel	1 E-6/K	ISO 11359-1/-2
Coefficient of linear thermal expansion (CLTE), normal	46 E-6/K	ISO 11359-1/-2

Flammability

Burning Behav. at thickness h	V-0 class	IEC 60695-11-10
-------------------------------	-----------	-----------------

VECTRA® A430

Liquid Crystal Polymer

Electrical properties

Relative permittivity, 100Hz	3.3	IEC 62631-2-1
Relative permittivity, 1MHz	2.7	IEC 62631-2-1
Dissipation factor, 100Hz	300 E-4	IEC 62631-2-1
Dissipation factor, 1MHz	160 E-4	IEC 62631-2-1
Volume resistivity	1E13 Ohm.m	IEC 62631-3-1
Surface resistivity	1E15 Ohm	IEC 62631-3-2
Electric strength	36 kV/mm	IEC 60243-1
Comparative tracking index	225	IEC 60112
Arc Resistance	130 s	UL 746B

Physical/Other properties

Density	1500 kg/m³	ISO 1183
---------	------------	----------

Injection

Drying Recommended	yes
Drying Temperature	150 °C
Drying Time, Dehumidified Dryer	4 - 6 h
Processing Moisture Content	≤0.01 %
Melt Temperature Optimum	295 °C
Min. melt temperature	285 °C
Max. melt temperature	310 °C
Screw tangential speed	0.2 - 0.3 m/s
Mold Temperature Optimum	100 °C
Min. mould temperature	80 °C
Max. mould temperature	120 °C
Back pressure	3 MPa
Ejection temperature	242 °C

Characteristics

Processing	Injection Moulding
Delivery form	Pellets
Special characteristics	Light stabilised or stable to light, Low wear / Low friction, High Flow

Additional information

Injection molding

Preprocessing

Vectra resins are well known for their excellent thermal and hydrolytic stability. In order to ensure these properties are optimum, the resin should be dried correctly prior to processing. Vectra A-grades should be dried at 150 C for a minimum of 4 hours in a desiccant dryer.

Processing

A three-zone screw evenly divided into feed, compression, and metering zones is preferred. A higher percentage of feed flights may be needed for smaller

VECTRA® A430

Liquid Crystal Polymer

machines: 1/2 feed, 1/4 compression, 1/4 metering.

Vectra LCPs are shear thinning, their melt viscosity decreases quickly as shear rate increases. For parts that are difficult to fill, the molder can increase the injection velocity to improve melt flow.

Processing Notes

Pre-Drying

VECTRA should in principle be predried. Because of the necessary low maximum residual moisture content the use of dry air dryers is recommended. The dew point should be $\leq -40^{\circ}\text{C}$. The time between drying and processing should be as short as possible.

Storage

For subsequent storage of the material in the dryer until processed the temperature does not need to be lowered for grades A, B, C, D and V ($\leq 24\text{ h}$).

Automotive


OEM
Continental

STANDARD
TST N 055 72.01-000

VECTRA® A430

Liquid Crystal Polymer

Stress-strain

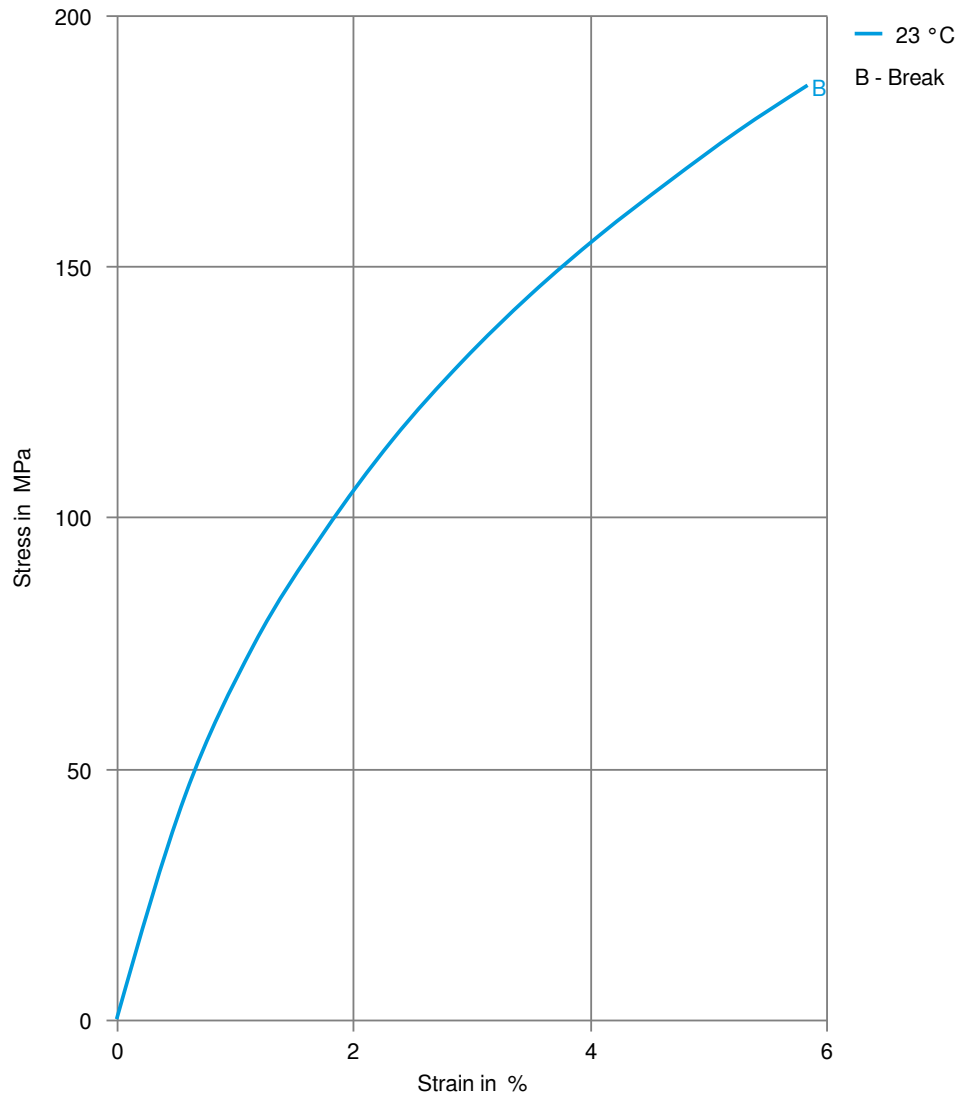

VECTRA® A430

Liquid Crystal Polymer

Secant modulus-strain

